



HUGE PANORAMAS.
INCREDIBLE ZOOM.
HIKVISION PANOVU SERIES
NETWORK CAMERA

PanoVu



What is the PanoVu Camera?

When designing surveillance applications, more and greater requirements have become necessary for monitoring large areas such as public plazas, arenas, airports, busy traffic intersections, and the like. In very large settings, security personnel need to see more with just one camera – not just a panoramic image, but zoomed-in, detailed views as well.

With that in mind, Hikvision designed the PanoVu Series all-in-one cameras to capture both excellent panorama and close-up details. Panoramic images are captured with four or eight 2-Megapixel sensors, rendering 180° or 360° panoramic monitoring with real-time ultra-HD resolution. The integrated design and high-speed pan-tilt-zoom action grants the user swift positioning over expansive areas with the power to bring sharp details into focus. At the same time, the PanoVu Series Cameras utilize Hikvision's ultra-low light Darkfighter technology, making colored images possible in poorly lit environments.

In addition, this amazing Hikvision PanoVu camera (DS-2DP1636-D) has been recognized by iF Design Award, for its simple design, compact structure and easy installation.



63rd iF International Design Awards – Germany, 2016

■ A Simple System for An Easy Installation

With an "All-in-one" design, a single product serves as a system that enables front-end splicing and delivers both panorama and every detail through full shot (180° or 360°) and close-up shot without using any additional server. You can enjoy a simple and time-saving installation and maintenance. The product allows for a quick installation as dome camera does---all you need are a cable and a power supply. Characterized by a flexibility and ease of operation, it provides a full range of options in the user interface to offer a panorama in the ultra-high-resolution scene while capturing the details dynamically in real-time. You can zoom in an image to its center to see the close-up details just by clicking on the image.



■ 360°/180° Overview and 36x Detailed Zoom


Combining several built-in horizontal cameras with PTZ power, one PanoVu camera captures 360° or 180° panoramic images as well as close-up images with 36x optical zoom. Note, too, that the panoramic images are stitched together within the camera itself, so you do not need another server or add-on to accomplish this.

360° Overview + 36x PTZ



■ DarkFighter Ultra-Low Light Technology

All fixed and zoom lenses of PanoVu cameras utilize Hikvision DarkFighter ultra-low light technology. Therefore, whether you are viewing 180° or 360° panoramic images or PTZ close-up images, each one can render colored images in very low-light environments

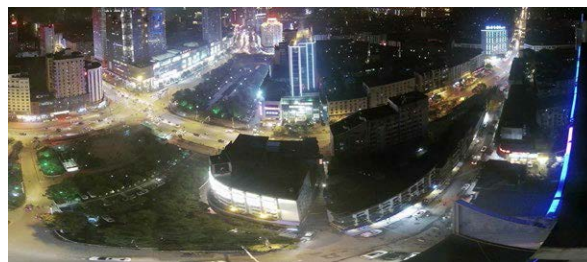




■ Smart Functions

With advanced video analysis and multiple target tracking algorithms, PanoVu Cameras also feature a wide range of Smart functions for multiple targets within the panoramic view, including intrusion detection, line crossing detection, and region entrance and exiting detection. The cameras can also send alarm signals linked to the PTZ for tracking, greatly improving security efficiency.



■ Application Scenarios

With intelligent and powerful features, the PanoVu Series Cameras can be used extensively, including applications like airports, transit stations, gymnasiums, scenic ports, and public squares needing a wide range of monitoring.

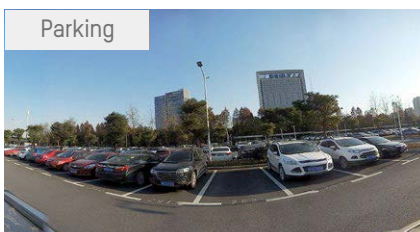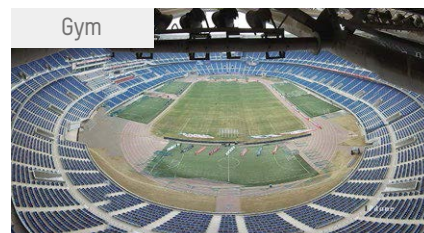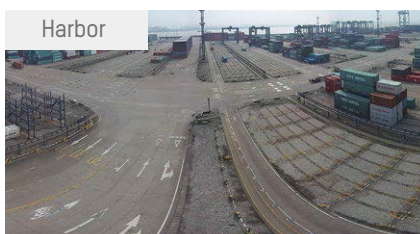

PRODUCT FEATURES



DS-2DP1636Z-D
360° Panoramic +2MP 36x
PTZ Camera



Panoramic Camera

- 8 x 1/1.9" Progressive Scan CMOS, up to 2 × 4096 × 1800 resolution @ 30 fps
- Horizontal angle of view: 360°; Vertical angle of view: 78°
- Color:0.005 Lux @(F1.8,AGC ON); B/W:0.0005 Lux @(F1.8,AGC ON)

PTZ Camera

- Supports manual-tracking & auto-tracking
- 1/1.9" Progressive Scan CMOS, up to 1920 × 1080 resolution @ 30 fps
- Color:0.002 Lux @(F1.5,AGC ON); B/W:0.0002 Lux @(F1.5,AGC ON)
- 36x Optical zoom, 16x Digital zoom
- 360° endless pan range and -15 to 90° tilt range
- 540°/s Pan Preset Speed and 400°/s Tilt Preset Speed
- 0.1° to 300°/s Manual Pan Speed and 0.1° to 240°/s Manual Tilt Speed
- 300 Presets programmable; preset image-freeze capability
- 8 Patrols, up to 32 presets per patrol
- Power-off Memory: Restores PTZ & lens status after reboot



DS-2DP0818Z-D
180° Panoramic +2MP 36x
PTZ Camera



Panoramic Camera

- 4 x 1/1.9" Progressive Scan CMOS, up to 4096 × 1800 resolution @ 30 fps
- Horizontal angle of view: 180°; Vertical angle of view: 78°
- Color:0.005 Lux @(F2.2,AGC ON); B/W:0.0005 Lux @(F2.2,AGC ON)

PTZ Camera

- Supports manual-tracking & auto-tracking
- 1/1.9" Progressive Scan CMOS, up to 1920 × 1080 resolution @ 30 fps
- Color:0.002 Lux @(F1.5,AGC ON); B/W:0.0002 Lux @(F1.5,AGC ON)
- 36x Optical zoom, 16x Digital zoom
- 360° Endless pan range and -15° to 90° tilt range
- 540°/s Pan Preset Speed and 400°/s Tilt Preset Speed
- 0.1° to 300°/s Manual Pan Speed and 0.1° to 240°/s Manual Tilt Speed
- 300 Presets programmable; preset image freezing capability
- 8 Patrols, up to 32 presets per patrol
- Power-off Memory: Restores PTZ & Lens status after reboot



DS-2DP1636-D
360° Panoramic
Camera



Panoramic Camera

- 8 x 1/1.9" Progressive Scan CMOS, up to 2 × 2400 × 3840 @ 25 fps
- Horizontal angle of view: 360°; Vertical angle of view: 180°
- Color:0.004 Lux @(F1.8,AGC ON); B/W:0.0004 Lux @(F1.8,AGC ON)



DS-2CD6986F-(H)
180° Panoramic Dome
Camera



Panoramic Camera

- Panoramic camera
- 4 x 1/1.8" Progressive Scan CMOS
- 180° Horizontal View
- Up to 4096 × 1800P resolution
- Min. Illumination: 0.002 Lux @ (F1.8, AGC ON)(Color), 0.0002 Lux @ (F1.8, AGC ON)(B/W)• 3D DNR
- 3D DNR
- Support 128G on-board storage
- DC12V/PoE
- Audio/Alarm IO

Recommend Combinations



DS-9632/64NI-I8/I16
Embedded H.265 4K 2U NVR

- 320 Mbps Bit Rate Input Max(up to 32/64-ch IP video)
- Third-party network cameras supported
- Up to 12MP resolution recording
- Support H.265/H.264/MPEG4 video formats
- 2-ch HDMI and 2-ch VGA outputs interfaces provided, HDMI1 output at up to 4K (3840 × 2160)resolution
- Dual Gigabit network interfaces
- 8/16 SATA, 1 eSATA, 2 USB2.0, 1 USB3.0
- Support RAID0,1,5,6,10



iVMS 5200 Pro
iVMS-5200 Professional Software

- Centralized equipment and user management
- Support ANPR and ANPR based parking management(New)
- Support business intelligence & POS integration;
- Maximum connected devices per system: 1024
- Control client: max 16, web client: max 16, mobile client: max 64;
- 3rd party surveillance integration via ONVIF protocol and SDK
- Mobile transportation management module (New)



Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
sateru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
potland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com